

- 8 Zones
- 99 Addressable Devices
- 60 Character Full Location Text Capability
- 72 Hour Standby
- Compact Design
- Programmable on-site
- No expensive ancillary programming equipment required
- Communication interface via RS 232 port
- Programmable Function Keys
- Analogue Functionality



DESCRIPTION

The Zerio EDA-Z1000 is a compact radio fire alarm system designed for use in smaller installations such as HMO's, small commercial premises and residential homes. With the culmination of 30 years experience of fire alarm system design and manufacture, the Z1000 complements Electro-Detectors' well established Millennium series of equipment with new features. The installer does not require expensive additional equipment to configure the complete system. Once installed, the control panel is used to aid system set-up, program devices and to commission the system.

The automatic set-up and learn modes simplify configuration decisions, reducing the possibility of errors. The servicing/addition/removal of devices does not require extra programming equipment. Complex cause and effects can be programmed into the panel using the front keypad or by connecting a PC or a standard PS/2 keyboard. Internal configuration and data can be downloaded on to a PC or stored on a removable memory card.

The panel is capable of warning of any devices approaching their pre-programmed alarm condition and should any of the devices gradually become contaminated, a warning condition is generated.

If devices need to be installed beyond the range of the control panel, a radio sounder can be configured as a booster unit, running from a mains supply, to relay information around the system. Up to 4 boosters can be added to the system, which operate as single stage repeaters.

TECHNICAL INFORMATION

Fully addressable for 99 devices in 8 zones
High visibility 4 line liquid crystal display with LED backlight
Separate LED indication for zone of alarm
Programmed via - Panel 12 button keypad
- PC interface (using adapter)
- PS/2 QWERTY keyboard
Built in power supply and charger for 12V
72 hr standby as standard (see over)
Programmable Fire Relay
2x Hardwired Programmable Monitored Inputs
Compact enclosure permitting siting in restricted spaces
Antennae are monitored for removal
Internal memory can be backed up to PC or proprietary memory card
2 x Programmable Function Keys
Sophisticated configuration settings allow complete user flexibility
Complies with all applicable requirements of BS5839 and EN54pt 2&4

SOFTWARE FEATURES

Secure protocol with complex error checking
255 event log memory
Date and Time displayed on Screen
Automatic Summer Time adjustment GMT/SMT
Flash backed memory to prevent loss of operating data
Non volatile storage of set-up information
4 level access code to assist in system security
Intelligent learn modes to assist in commissioning the system
Both sounder tones and sounder zones are uniquely programmable
Programmable test modes
Program firmware upgradeable via PC
Pre-alarm and head dirty warnings

CONTROLS

Simplicity of operation is a principal design feature. There are four levels of access via a password entry system for the following : (i) Basic user. (ii) Advanced user. (iii) Service engineer. (iv) Commissioning engineer (v) Advanced commissioning engineer. The menu system is a very simple to use structure using navigation keys to select the appropriate option. Programming of the system can be performed using the panel keypad, a PS/2 keyboard connected to the panel or a PC connected to the panel.

INDICATORS

All necessary information is provided by a 4 line liquid crystal display which illuminates when a key is pressed or an event has occurred. Additional indication is provided by 8 red 'Zones in alarm' LED's, 5 yellow fault indicators, 4 yellow status indicators and a green supply indicator.


SPECIFICATION

| | |
|---|---|
| Maximum Number of Zones | 8 |
| Maximum Number of Devices (Devices include Detectors, Call Points, Transmitters, Sounders and Actuators) | 99 |
| Maximum no of radio booster units | 4 |
| Dimensions (mm) W x H x D | 275 x 220 x 85mm |
| Weight (not including battery) | 4Kg |
| Alarm Indicators | Twin flashing red LEDs 8x Red individual zone indication Fire message on LCD with 60 scrolling characters of location text |
| Fault Indicators | Amber LEDs LCD providing details and location of fault with 60 scrolling characters of location text |
| Event Log Storage | 255 events maximum |

| | |
|-------------------------------------|--|
| Supply: | Mains : 230V 50Hz 0.2A max Battery : 1x12V 2.8 Ah sealed lead acid (giving 56 hour standby) 2x6V 4.0Ah sealed lead acid (giving 72 hour standby) |
| Auxiliary relays | Fire -1A Changeover Contacts Fault -1A Changeover Fail Safe Contacts |
| Inputs | 2x wired callpoint monitored circuit (4k7 ohm end of line resistor monitored for open and short circuit, 470 ohm alarm load) |
| Operating Frequency | 173.225MHz |
| Modulation | NBFM |
| Output Power (ERP) | 10mW |
| Operational Temperature | 0°C to +60°C |
| Applicable Standards and Approvals: | |
| European Fire Alarm | EN54 Part 2 and 4 |
| British Standards | BS 5839 Part 1:2002 |
| R&TTE | EN300 220 |
| EMC Standards | EN301 489-3 EN50130-4 EN60950:2001 |

Part Numbers for System

| Part No | Description |
|-----------|--|
| EDA-Z1000 | Zerio 8 Zone Control Panel |
| EDA-C1000 | Radio Call-point |
| EDA-R1000 | Radio Optical Smoke Detector |
| EDA-R2000 | Radio Combined Optical Smoke Detector with Sounder |
| EDA-D1000 | Radio Heat Detector |
| EDA-D2000 | Radio Combined Sounder with Heat Detector |
| EDA-A2000 | Radio Sounder Unit |
| EDA-A2060 | Radio Strobe Unit |
| EDA-A2080 | Radio Output Unit with Clean Changeover Contacts |
| EDA-A2102 | Booster / Sounder Unit |
| EDA-A2110 | PSU for A2102 |

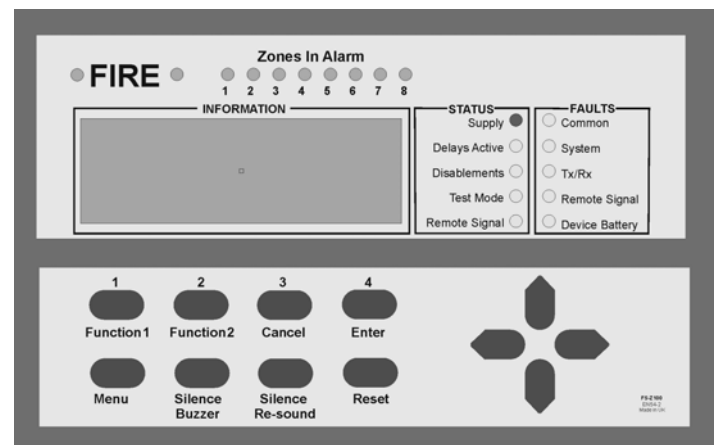

Display and Control Layout